

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 August 2002 (01.08.2002)

PCT

(10) International Publication Number  
**WO 02/059835 A1**

(51) International Patent Classification<sup>7</sup>: **G06T 5/00**

SPASSOVA, Tatiana, G.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). ELAND, Rudolf; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB01/02685

(22) International Filing Date:  
19 December 2001 (19.12.2001)

(74) Agent: GROENENDAAL, Antonius, W., M.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(81) Designated States (*national*): CN, JP, KR.

(26) Publication Language: English

(30) Priority Data:  
01200294.5 26 January 2001 (26.01.2001) EP

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).


(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Published:  
— with international search report

(72) Inventors: OJO, Olukayode, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). KWAAITAAL-

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPATIO-TEMPORAL FILTER UNIT AND IMAGE DISPLAY APPARATUS COMPRISING SUCH A SPATIO-TEMPORAL FILTER UNIT

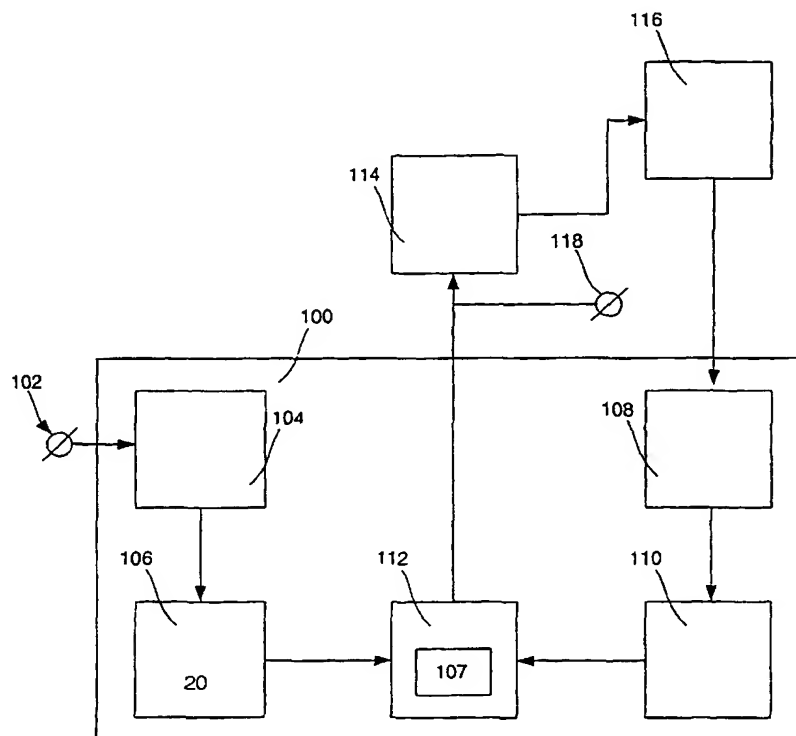

(57) Abstract: Noise reduction is an important feature in consumer television. This is realized by spatial, temporal or spatio-temporal filters. Spatial filters require pixels from within one image, while temporal filters require samples from two or more successive images. The spatio-temporal filter unit (100) according to this invention integrates spatial and implicit motion-compensated temporal noise reduction in one filter. For the motion compensation no motion vectors are required. The spatio-temporal filter unit (100) is provided with a sigma filter (112) comprising one filter kernel (107) designed to operate on the pixels from both a current image and from the output of the spatio-temporal filter unit, being a temporally recursive filtered image. The operation of the spatio-temporal filter unit (100) can be adjusted by varying the thresholds of the sigma filter (112) and the selection of pixels. The adjustments can be controlled by a motion estimator (222), a motion detector (224) and a noise estimator (220).

WO 02/059835 A1

Spatio-temporal filter unit and image display apparatus comprising such a spatio-temporal filter unit

The invention relates to a spatio-temporal filter unit, provided with a sigma filter, to reduce the noise in images.

The invention further relates to an image display apparatus comprising such a spatio-temporal filter unit.

5

A unit of the kind described in the opening paragraph is known from G. de Haan et al, "Memory integrated noise reduction for television," in IEEE Transactions on Consumer Electronics, Vol. 42, No 2, May 1996, Pages 175-181. In this article a unit is described which is a cascaded system of two filters: a spatial and a temporal one. The spatial and temporal filter together should result in effective noise reduction. In general, spatial filters require pixels from one image, while temporal filters require samples from two or more successive images.

The spatial filter is a recursive sigma filter. It is based on a variant of the sigma nearest neighbors selection process. The combination process involves weighted averaging, which is optimal for additive white Gaussian noise. The weights of the described sigma filter can have three possible values, which are selected based on thresholds that are adapted to the noise level. In the article also a noise estimator is described to estimate the noise level.

The temporal filter is realized as a motion compensated first order temporal recursive filter. Therefore, this temporal filter requires a motion estimation and motion compensation system, which makes the concept expensive. Furthermore, a motion detection means is necessary to adapt the strength of the filtering when motion occurs. Otherwise the image is distorted.

25

It is a first object of the invention to provide a spatio-temporal filter unit, of the kind described in the opening paragraph that integrates spatial and implicit motion-

compensated temporal noise reduction in one filter. For the motion compensation no motion vectors, or other means to express the amount and direction of movement, are required.

It is a second object of the invention to provide an image display apparatus comprising such a spatio-temporal filter unit.

5           The first object of the invention is achieved in that the spatio-temporal filter unit comprises one filter kernel designed to operate on pixels from both a current image and from the output of the spatio-temporal filter unit, being a temporally recursive filtered image. The filtering is based on the sigma nearest neighbors selection. Pixels that have poor correlation with the original pixel are automatically discarded, whereas other pixels  
10           contribute to the output in proportion to their correlation. It involves weighted averaging of selected pixels from a predefined 3-dimensional window comprising horizontal, vertical and temporal directions. A major characteristic of this spatio-temporal filter unit is that the spatial and temporal filtering are done within the same filter kernel. This reduces the implementation cost significantly and leads to an easily optimized concept. Moreover, problems such as the  
15           so-called "dirty-window" effect or frozen noise, "comet tails," etc., are automatically solved since the temporal filter is no longer separable. Noise breakthrough at edges or around moving objects is also eliminated because the spatial and temporal filters complement each other.

          An embodiment of the spatio-temporal filter unit according to the invention  
20           comprises:  
          - a spatial pixel buffer to store pixels of the current image;  
          - a spatial pixel selector to select pixels from the spatial pixel buffer;  
          - a temporal pixel buffer to buffer pixels from the output of the spatio-temporal filter unit, being a temporally recursive filtered image;  
25           - a temporal pixel selector to select pixels from the temporal pixel buffer; and  
          - the sigma filter comprising one filter kernel designed to operate on the pixels from both the spatial pixel selector and the temporal pixel selector.

          In the spatial pixel buffer, a 2-dimensional spatial pixel selector is defined to select pixels to enable spatial filtering. In order to add temporally recursive filtered pixels in the filter kernel  
30           of the sigma filter, a second 2-dimensional temporal pixel selector is defined in the temporal pixel buffer, which is filled with pixels taken from a picture memory. In this way, 3-dimensional spatio-temporal filtering is realized within one filter aperture. The output of the sigma filter is stored in a picture memory and used for subsequent filtering. This is the temporal recursive part of the processing. Motion detection is inherent in the filtering. Each

pixel is first compared with the original one to determine its contribution to the output. Where motion occurs, the pixel will have a large difference in grey value. Therefore, it will be automatically discarded. Furthermore, motion compensation is also inherent. This is realized by using a temporal pixel selector for the selection of the temporally recursive  
5 filtered pixels and a discriminating averaging filter, which uses a threshold. If there is no motion, the grey level correlation relative to the central input pixel is high around the central pixel of the previous image. When motion occurs, this correlation is shifted in position automatically following the motion trajectory. Provided the motion is low enough, temporal filtering will take place because correlated pixels can be found somewhere within the  
10 temporal window, i.e. the temporal pixel selector. In other words, motion compensation is implicitly done, thereby making explicit motion compensation redundant.

An embodiment of the spatio-temporal filter unit according to the invention comprises an adaptive sigma filter. The filter thresholds of the sigma filter are adjustable. That means the degree of filtering can be increased or decreased to suit the taste of the user of  
15 this embodiment of the spatio-temporal filter unit or of an image display apparatus comprising such a spatio-temporal filter unit. The thresholds for spatial and temporal filtering can be independently determined so that the desired balance between spatial and temporal filtering is achieved.

An embodiment of the spatio-temporal filter unit according to the invention is  
20 characterized in that of at least one of the pixel selectors, being the temporal pixel selector and the spatial pixel selector, the aperture can be adjusted. This determines the strength of the filtering and the characteristics of the output. A combination of a narrow aperture and a large aperture with image alternation gives good results.

An embodiment of the spatio-temporal filter unit according to the invention is  
25 characterized in that at least one of the pixel selectors, being the temporal pixel selector and the spatial pixel selector, is designed such that the distance between the selected pixels is adjustable. The result is that the aperture of the selector can be adjusted while keeping the number of selected pixels more or less constant. The costs of the pixel selectors are based on their storage capacity, i.e. the number of pixels they can store simultaneously. The advantage  
30 of this embodiment according to the invention is that the costs for processing of the pixels can be relatively low.

An embodiment of the spatio-temporal filter unit according to the invention comprises a motion detector designed to detect motion and to control the aperture of the temporal pixel selector based on detected motion. The aperture determines the strength of the

filtering for still images and the range of the motion compensation for moving sequences. An advantage of such an embodiment is that the implicit motion compensation is optimized. The motion detector may detect global or local motion. As the aperture can be determined on field basis, an optimal setting can be found for each sequence once the degree of motion activity is known. The detector does not have to provide information about the direction of movement. It is also possible that an external motion estimator provides information about the estimated motion.

An embodiment of the spatio-temporal filter unit according to the invention comprises a motion estimator designed to supply motion vectors and to control the position of the temporal pixel selector related to the temporal pixel buffer, based on the motion vectors supplied by the motion estimator. The advantage of such an embodiment is that the temporal proximity is increased. This is especially beneficial in the case of high object velocities. It is also possible that an external motion estimator provides the motion vectors.

An embodiment of the spatio-temporal filter unit according to the invention comprises a noise estimator designed to estimate a noise level in the current image and to control the aperture of at least one of the pixel selectors, being the temporal pixel selector and the spatial pixel selector, based on the estimated noise level. As said the strength of filtering is related to the aperture of the pixel selectors. Relatively more filtering is allowed in case of a relatively high estimated noise level. Therefore optimal noise filtering is achieved at all noise levels. It is also possible that an external noise estimator provides the estimated noise level.

An embodiment of the spatio-temporal filter unit according to the invention comprises a noise estimator designed to estimate a noise level in the current image and to control thresholds of the adaptive sigma filter based on the estimated noise level. The thresholds can be increased in case of a relatively high estimated noise level and decreased in case of a relatively low estimated noise level. Therefore optimal noise filtering is achieved at all noise levels.

These and other aspects of the spatio-temporal filter unit and the image display apparatus according to the invention will become apparent from and will be elucidated with reference with respect to the implementations and embodiments described hereinafter and with reference to the accompanying drawings, wherein:

Fig. 1 schematically shows an embodiment of a spatio-temporal filter unit;

Fig. 2 schematically shows an embodiment of a spatio-temporal filter unit comprising a noise estimator, a motion estimator and a motion detector; and

Fig. 3 shows elements of an image display apparatus.

5

Figure 1 schematically shows an embodiment of a spatio-temporal filter unit 100 and two memory units which are used by the spatio-temporal filter unit 100. These memory units might be shared with other units in a system comprising the spatio-temporal filter unit 100. The first memory unit is a picture memory 114 to store the output of the spatio-temporal filter unit, being a temporally recursive filtered image. The second memory unit is a cache 116. The signal representing the images enters the spatio-temporal filter unit 100 at the connection 102. The filtered signal leaves the spatio-temporal filter unit 100 at the connection 118. Pixels from this filtered signal are also stored in the picture memory 114. Pixels from an image that enter the spatio-temporal filter unit 100 are buffered in the spatial pixel buffer 104. The spatial pixel selector 106 selects pixels from the spatial pixel buffer 104 and provides these to the filter kernel 107 of the sigma filter 112. Pixels from the picture memory 114 are cached in the cache 116 for reasons of performance. From the cache 116 pixels are buffered in the temporal pixel buffer 108. The temporal pixel selector 110 selects pixels from the temporal pixel buffer 108 and provides these to the filter kernel 107 of the sigma filter 112. In this way the filter kernel 107 operates on the pixels from both the spatial pixel selector 106 and the temporal pixel selector 110.

Figure 2 schematically shows a relatively more sophisticated embodiment of a spatio-temporal filter 200. The white boxes in Figure 2 are part of the spatio-temporal filter 200. The shaded boxes in Figure 2 are not part of the spatio-temporal filter 200. These shaded boxes represent memory units. These might be shared with other units in a system comprising the spatio-temporal filter unit 200. The first memory unit is a picture memory 214 to store the output of the spatio-temporal filter unit, being a temporally recursive filtered image. The second memory unit is a cache 216. The signal representing the images enter the spatio-temporal filter unit 200 at the connection 202. The filtered signal leaves the spatio-temporal filter unit 200 at the connection 218. Pixels from this filtered signal are also stored in the picture memory 214. Pixels from an image that enters the spatio-temporal filter unit 200 are buffered in the spatial pixel buffer 204. The spatial pixel selector 206 selects pixels from the spatial pixel buffer 204 and provides these to the filter kernel 207 of the sigma filter 212. Pixels from the picture memory 214 are cached in the cache 216 for reasons of

performance. From the cache 216 pixels are buffered in the temporal pixel buffer 208. The temporal pixel selector 210 selects pixels from the temporal pixel buffer 208 and provides these to the filter kernel 207 of the sigma filter 212. In this way the filter kernel 207 operates on the pixels from both the spatial pixel selector 206 and the temporal pixel selector 210. The spatio-temporal filter 200 comprises a motion detector 224 designed to detect motion and to control the aperture of the temporal pixel selector 208 based on detected motion. The spatio-temporal filter 200 comprises a motion estimator 222 designed to supply motion vectors and to control the position of the temporal pixel selector 210 related to the temporal pixel buffer 208, based on the motion vectors supplied by the motion estimator. The spatio-temporal filter 200 comprises a noise estimator 220 to estimate a noise level in the current image and to control the aperture of at least one of the pixel selectors, being the temporal pixel selector 210 and the spatial pixel selector 206, based on the estimated noise level. Besides that the noise estimator 220 controls thresholds of the adaptive sigma filter 212, based on the estimated noise level.

Figure 3 shows elements of an image display apparatus 300 according to the invention. The image display apparatus 300 has a receiving means 302 for receiving a video signal representing the images to be displayed. The signal may be a broadcast signal received via an antenna or cable but may also be a signal from a storage device like a VCR (Video Cassette Recorder) or DVD (Digital Versatile Disk). The image display apparatus 300 further has a spatio-temporal filter unit 304 for filtering the video signal and a display device 306 for displaying the images represented by the filtered video signal. The spatio-temporal filter unit 304 is implemented as described in Figure 1 or Figure 2.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention and that those skilled in the art will be able to design alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be constructed as limiting the claim. The word 'comprising' does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements and by means of a suitable programmed computer. In the unit claims enumerating several means, several of these means can be embodied by one and the same item of hardware.

## CLAIMS:

1. A spatio-temporal filter unit (100), provided with a sigma filter (112), to reduce the noise in images, characterized in that the sigma filter (112) comprises one filter kernel (107) designed to operate on pixels from both a current image and from the output (118) of the spatio-temporal filter unit, being a temporally recursive filtered image.

5

2. A spatio-temporal filter unit (100) as claimed in Claim 1, characterized in that it comprises:

- a spatial pixel buffer (104) to store pixels of the current image;
- a spatial pixel selector (106) to select pixels from the spatial pixel buffer (104);
- 10 - a temporal pixel buffer (108) to buffer pixels from the output (118) of the spatio-temporal filter unit, being a temporally recursive filtered image;
- a temporal pixel selector (110) to select pixels from the temporal pixel buffer (108); and
- the sigma filter (112) comprising one filter kernel (107) designed to operate on the pixels from both the spatial pixel selector (106) and the temporal pixel selector (110).

15

3. A spatio-temporal filter unit (100) as claimed in Claim 2, characterized in that it comprises an adaptive sigma filter (112).

4. A spatio-temporal filter unit (100) as claimed in Claim 3, characterized in that  
20 of at least one of the pixel selectors, being the temporal pixel selector (110) and the spatial pixel selector (106), the aperture can be adjusted.

5. A spatio-temporal filter unit (100) as claimed in Claim 4, characterized in that  
at least one of the pixel selectors, being the temporal pixel selector (110) and the spatial pixel  
25 selector (106), is designed such that the distance between the selected pixels is adjustable.

6. A spatio-temporal filter unit (200) as claimed in Claim 4, characterized in that it comprises a motion detector (224) designed to detect motion and to control the aperture of the temporal pixel selector (210) based on detected motion.



7. A spatio-temporal filter unit (200) as claimed in Claim 4, characterized in that it comprises a motion estimator (222) designed to supply motion vectors and to control the position of the temporal pixel selector (210) related to the temporal pixel buffer (208), based on the motion vectors supplied by the motion estimator (222).

8. A spatio-temporal filter unit (200) as claimed in Claim 4, characterized in that it comprises a noise estimator (220) designed to estimate a noise level in the current image and to control the aperture of at least one of the pixel selectors, being the temporal pixel selector (210) and the spatial pixel selector (206), based on the estimated noise level.

9. A spatio-temporal filter unit (200) as claimed in Claim 4, characterized in that it comprises a noise estimator (220) designed to estimate a noise level in the current image and to control thresholds of the adaptive sigma filter (212), based on the estimated noise level.

10. An image display apparatus (300) comprising:

- receiving means (302) for receiving a signal representing images;
- a display device (306) for displaying the images; and
- a spatio-temporal filter unit (100), provided with a sigma filter (112), to reduce the noise in the images, characterized in the sigma filter (112) comprises one filter kernel (107) designed to operate on pixels from both a current image and from the output (118) of the spatio-temporal filter unit, being a temporally recursive filtered image.

11. An image display apparatus (300) comprising:

- receiving means (302) for receiving a signal representing images;
- a display device (306) for displaying the images; and
- a spatio-temporal filter unit (100), provided with a sigma filter (112), to reduce the noise in the images, characterized in that it comprises:
  - a spatial pixel buffer (104) to store pixels of a current image;
  - a spatial pixel selector (106) to select pixels from the spatial pixel buffer (104);
  - a temporal pixel buffer (108) to buffer pixels from the output (118) of the spatio-temporal filter unit, being a temporally recursive filtered image;
  - a temporal pixel selector (110) to select pixels from the temporal pixel buffer (108); and

- the sigma filter (112), being an adaptive sigma filter comprising one filter kernel (107) designed to operate on the pixels from both the spatial pixel selector (106) and the temporal pixel selector (110).

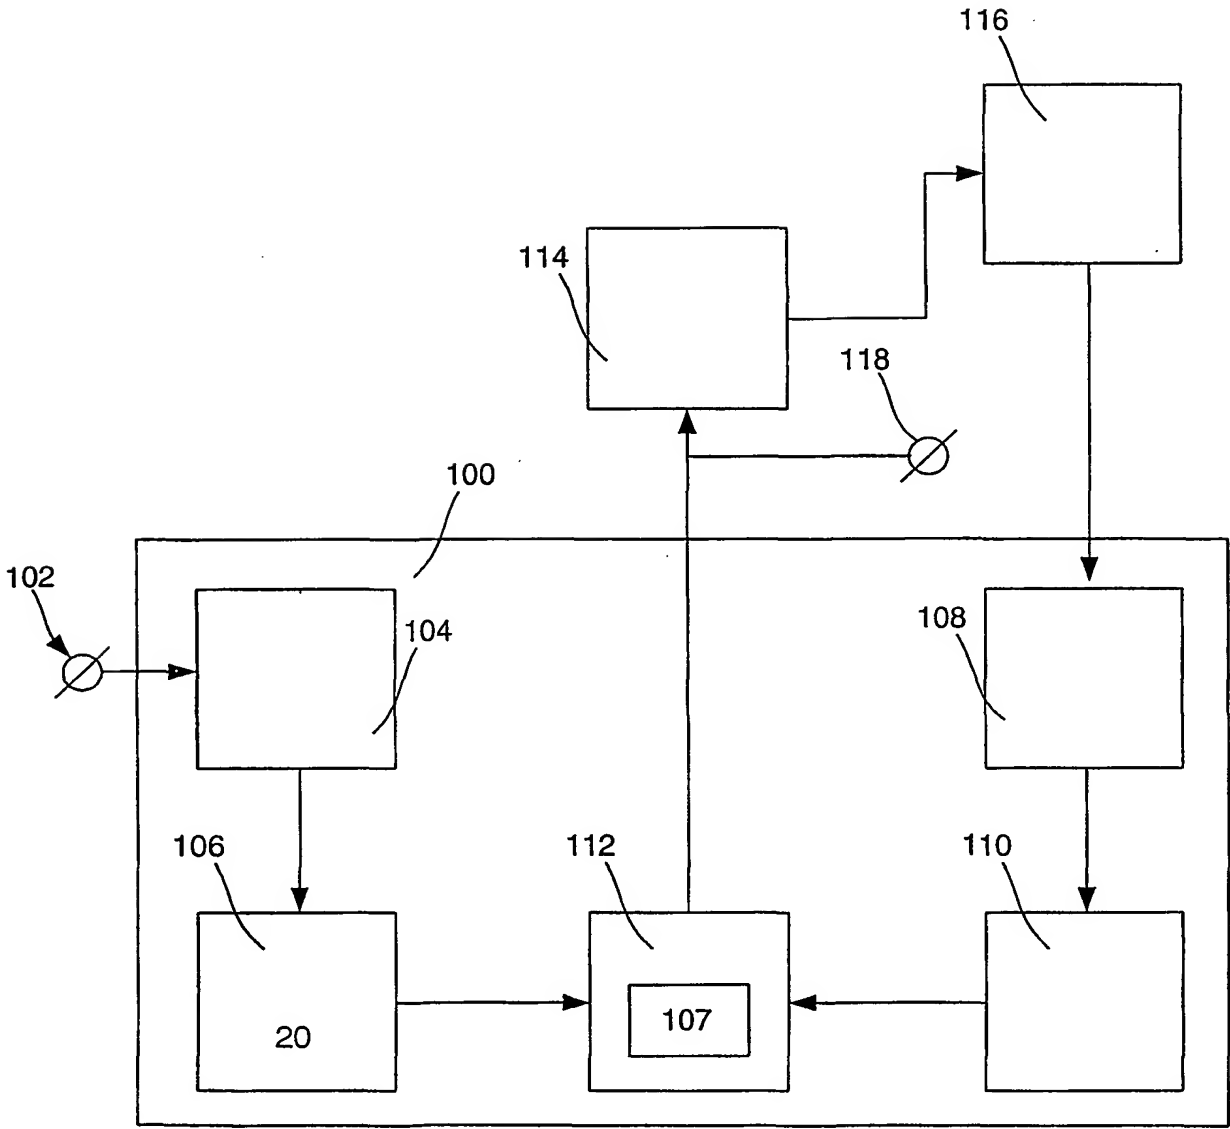


FIG.1

2/3

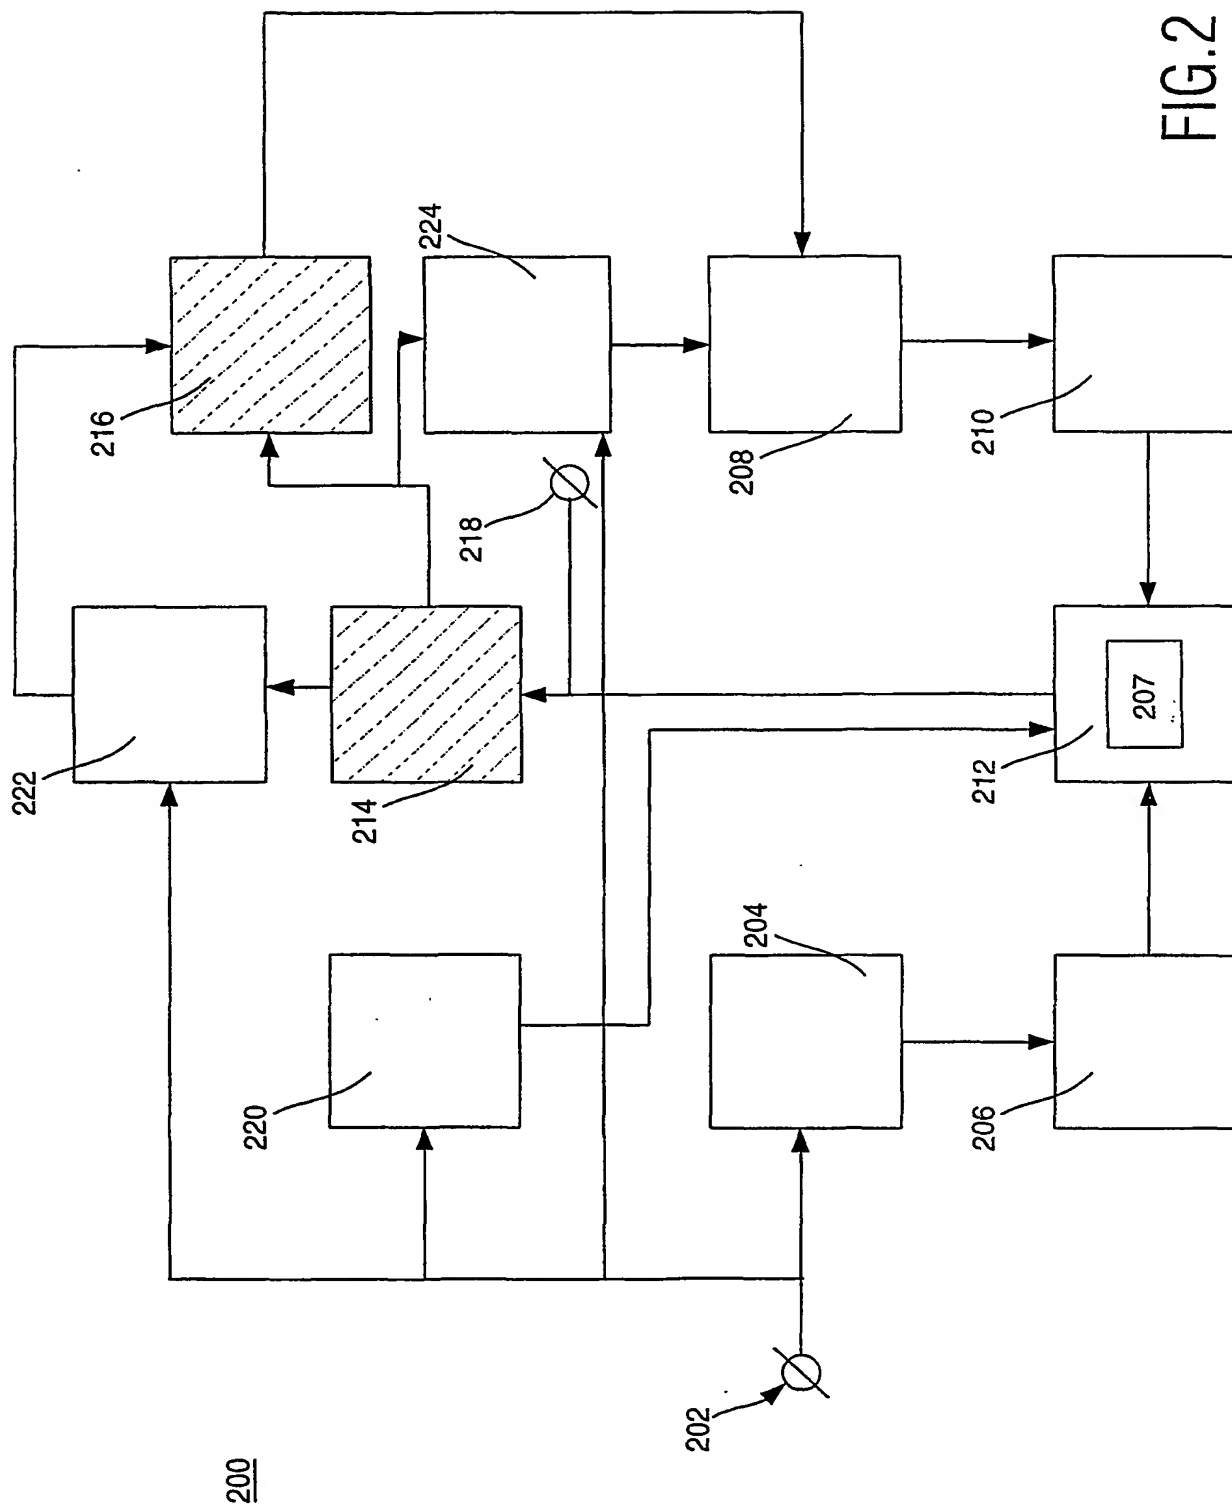


FIG.2

200

3/3

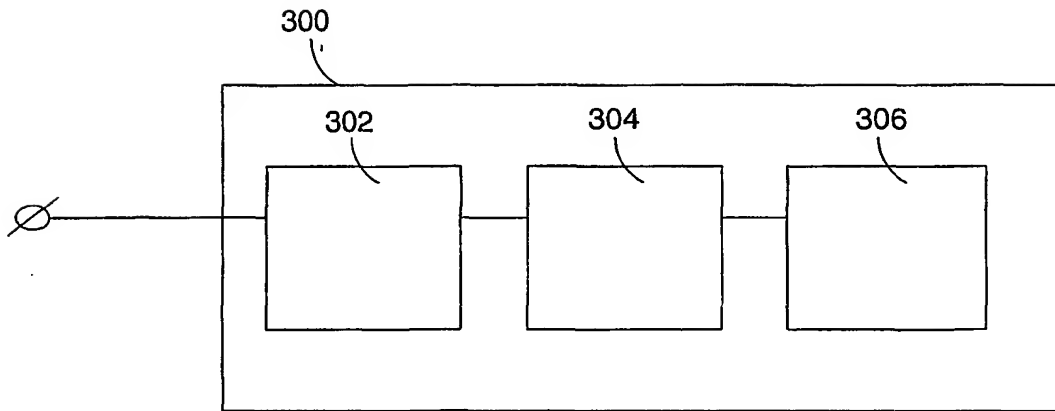


FIG.3

## INTERNATIONAL SEARCH REPORT

In Application No  
PCT/IB 01/02685A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G06T5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 601 655 A (PHILIPS ELECTRONICS NV) 15 June 1994 (1994-06-15) the whole document	1-11
A	HAAN DE G ET AL: "MEMORY INTEGRATED NOISE REDUCTION IC FOR TELEVISION" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, IEEE INC. NEW YORK, US, vol. 42, no. 2, 1 May 1996 (1996-05-01), pages 175-181, XP000596763 ISSN: 0098-3063 cited in the application abstract sections 1, 2	1, 2, 10, 11

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

27 March 2002

Date of mailing of the international search report

12/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kröner, S

## INTERNATIONAL SEARCH REPORT

In: **nal Application No**  
PCT/IB 01/02685

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	LEE J-S: "DIGITAL IMAGE SMOOTHING AND THE SIGMA FILTER" COMPUTER VISION GRAPHICS AND IMAGE PROCESSING, ACADEMIC PRESS, DULUTH, MA, US, vol. 24, 1983, pages 255-269, XP000199489 section 2	1,10,11
A	OJO O A ET AL: "An algorithm for integrated noise reduction and sharpness enhancement" IEEE TRANS. CONSUM. ELECTRONICS (USA), vol. 46, no. 3, August 2000 (2000-08), pages 474-480, XP002194412 IEEE, USA ISBN: 0-7803-6301-9 sections 1, 2, 3.1, 3.3	1,10,11
A	KLEIHORST R P: "MOTION COMPENSATED NOISE FILTERING OF IMAGE SEQUENCES" SIGNAL PROCESSING THEORIES AND APPLICATIONS. BRUSSELS, AUG. 24 - 27, 1992, PROCEEDINGS OF THE EUROPEAN SIGNAL PROCESSING CONFERENCE (EUSIPCO), AMSTERDAM, ELSEVIER, NL, vol. 3 CONF. 6, 24 August 1992 (1992-08-24), pages 1385-1388, XP000356500 figure 2	1,10,11
A	FR 2 624 680 A (THOMSON GRAND PUBLIC) 16 June 1989 (1989-06-16) page 1, line 1 - line 7; figure 12	1-11
A	CHIEN S-I S-I ET AL: "Adaptive window method with sizing vectors for reliable correlation-based target tracking" PATTERN RECOGNITION, PERGAMON PRESS INC. ELMSFORD, N.Y, US, vol. 33, no. 2, February 2000 (2000-02), pages 237-249, XP004243840 ISSN: 0031-3203 section 3.2.2 figure 11	6,7

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 01/02685

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0601655	A	15-06-1994	EP	0601655 A1	15-06-1994
			JP	7046200 A	14-02-1995
FR 2624680	A	16-06-1989	FR	2624680 A1	16-06-1989